



Hytrel® 5553FG NC010

THERMOPLASTIC POLYESTER ELASTOMER

Common features of Hytrel® thermoplastic polyester elastomer include mechanical and physical properties such as exceptional toughness and resilience, high resistance to creep, impact and flex fatigue, flexibility at low temperatures and good retention of properties at elevated temperatures. In addition, it resists many industrial chemicals, oils and solvents. Special grades include heat stabilised, flame retardant, food contact compliant, blow molding and extrusion grades. Concentrates offered include black pigments, UV protection additives, heat stabilisers, and flame retardants. Hytrel® thermoplastic polyester elastomer is plasticiser free.

The good melt stability of Hytrel® thermoplastic polyester elastomer normally enables the recycling of properly handled production waste. If recycling is not possible, DuPont recommends, as the preferred option, incineration with energy recovery (-24 kJ/g of base polymer) in appropriately equipped installations. For disposal, local regulations have to be observed.

Hytrel® thermoplastic polyester elastomer typically is used in demanding applications in the automotive, fluid power, electrical/electronic, consumer goods, appliance and power tool, sporting goods, furniture, industrial and off-road transportation/equipment industry.

Hytrel® 5553FG NC010 is a high performance thermoplastic polyester elastomer developed for applications in contact with food.

FOOD CONTACT

This product is manufactured according to Good Manufacturing Practice (GMP) principles and generally accepted in food contact applications in Europe and the USA when meeting applicable use conditions. For details, individual compliance statements are available from your DuPont representative.

Product information

Resin Identification	TPC-ET	ISO 1043
Part Marking Code	>TPC-ET<	ISO 11469

Rheological properties

Melt volume-flow rate	7 cm ³ /10min	ISO 1133
Melt mass-flow rate	8 g/10min	ISO 1133
Temperature	220 °C	ISO 1133
Load	2.16 kg	ISO 1133
Melt mass-flow rate, Temperature	220 °C	ISO 1133
Melt mass-flow rate, Load	2.16 kg	ISO 1133
Moulding shrinkage, parallel	1.4 %	ISO 294-4, 2577
Moulding shrinkage, normal	1.4 %	ISO 294-4, 2577



Hytrel® 5553FG NC010

THERMOPLASTIC POLYESTER ELASTOMER

Typical mechanical properties

Tensile Modulus	170 MPa	ISO 527-1/-2
Yield stress	14 MPa	ISO 527-1/-2
Yield strain	40 %	ISO 527-1/-2
Stress at 5% strain	6.6 MPa	ISO 527-1/-2
Stress at 10% strain	10.2 MPa	ISO 527-1/-2
Stress at 100% strain	15 MPa	ISO 527-1/-2
Stress at break	40 MPa	ISO 527-1/-2
Nominal strain at break	600 %	ISO 527-1/-2
Strain at break	>300 %	ISO 527-1/-2
Charpy impact strength, 23°C	N kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	N kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	N kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -40°C	145 kJ/m ²	ISO 179/1eA
Poisson's ratio	0.49 -	
Shore D hardness, 15s	51 -	ISO 48-4
Shore D hardness, max	56 -	ISO 48-4

Thermal properties

Melting temperature, 10°C/min	201 °C	ISO 11357-1/-3
Glass transition temperature, 10°C/min	-20 °C	ISO 11357-1/-2
Temp. of deflection under load, 1.8 MPa	45 °C	ISO 75-1/-2
Temp. of deflection under load, 0.45 MPa	70 °C	ISO 75-1/-2
Vicat softening temperature, 50°C/h, 50N	75 °C	ISO 306
Vicat softening temperature, 50°C/h 10N	180 °C	ISO 306
Eff. thermal diffusivity	5.44E-8 ^[DS] m ² /s	

[DS]: Derived from similar grade

Flammability

Burning Behav. at 1.5mm nom. thickn.	HB class	IEC 60695-11-10
Thickness tested	1.5 mm	IEC 60695-11-10
Oxygen index	20 ^[DS] %	ISO 4589-1/-2
FMVSS Class	SE -	ISO 3795 (FMVSS 302)

[DS]: Derived from similar grade

Electrical properties

Relative permittivity, 100Hz	4.8 ^[DS] -	IEC 62631-2-1
Relative permittivity, 1MHz	4.4 ^[DS] -	IEC 62631-2-1
Dissipation factor, 100Hz	90 ^[DS] E-4	IEC 62631-2-1
Dissipation factor, 1MHz	375 ^[DS] E-4	IEC 62631-2-1
Volume resistivity	4E11 ^[DS] Ohm.m	IEC 62631-3-1
Surface resistivity	>1E15 ^[DS] Ohm	IEC 62631-3-2
Electric strength	19 ^[DS] kV/mm	IEC 60243-1

Hytrel® 5553FG NC010

THERMOPLASTIC POLYESTER ELASTOMER

Comparative tracking index	600 ^[DS] -	IEC 60112
[DS]: Derived from similar grade		

Other properties

Humidity absorption, 2mm	0.2 %	Sim. to ISO 62
Water absorption, 2mm	0.6 %	Sim. to ISO 62
Density	1200 kg/m ³	ISO 1183
Density of melt	1030 ^[DS] kg/m ³	
Water Absorption, Immersion 24h	0.6 %	Sim. to ISO 62
[DS]: Derived from similar grade		

VDA Properties

Emission of organic compounds	8.5 µgC/g	VDA 277
Odour	5 class	VDA 270
Fogging, G-value (condensate)	0.1 mg	ISO 6452

Injection

Drying Recommended	yes
Drying Temperature	100 °C
Drying Time, Dehumidified Dryer	2 - 3 h
Processing Moisture Content	≤0.08 %
Melt Temperature Optimum	230 °C
Min. melt temperature	220 °C
Max. melt temperature	250 °C
Mold Temperature Optimum	45 °C
Min. mould temperature	45 °C
Max. mould temperature	55 °C

Extrusion

Drying Temperature	90 - 110 °C
Drying Time, Dehumidified Dryer	2 - 3 h
Processing Moisture Content	≤0.06 %
Melt Temperature Optimum	225 °C
Melt Temperature Range	220 - 235 °C

Additional Information

Injection molding

PREPROCESSING

Drying recommended = Yes
 Drying temperature = 100°C
 Drying time, dehumidified dryer = 2-3 h
 Processing moisture content = <0.08 %



Hytrel® 5553FG NC010

THERMOPLASTIC POLYESTER ELASTOMER

Profile extrusion

PROCESSING

Melt temperature optimum = 230°C
Melt temperature range = 220-250°C
Mold temperature optimum = 45°C
Mold temperature range = 45-55°C

PREPROCESSING

Drying temperature = 100°C
Drying time, dehumidified dryer = 2-3 h
Processing moisture content = <0.06 %

PROCESSING


Melt temperature optimum = 225°C
Melt temperature range = 215-235°C



Hytrel[®] 5553FG NC010

THERMOPLASTIC POLYESTER ELASTOMER

Shearstress-shear rate

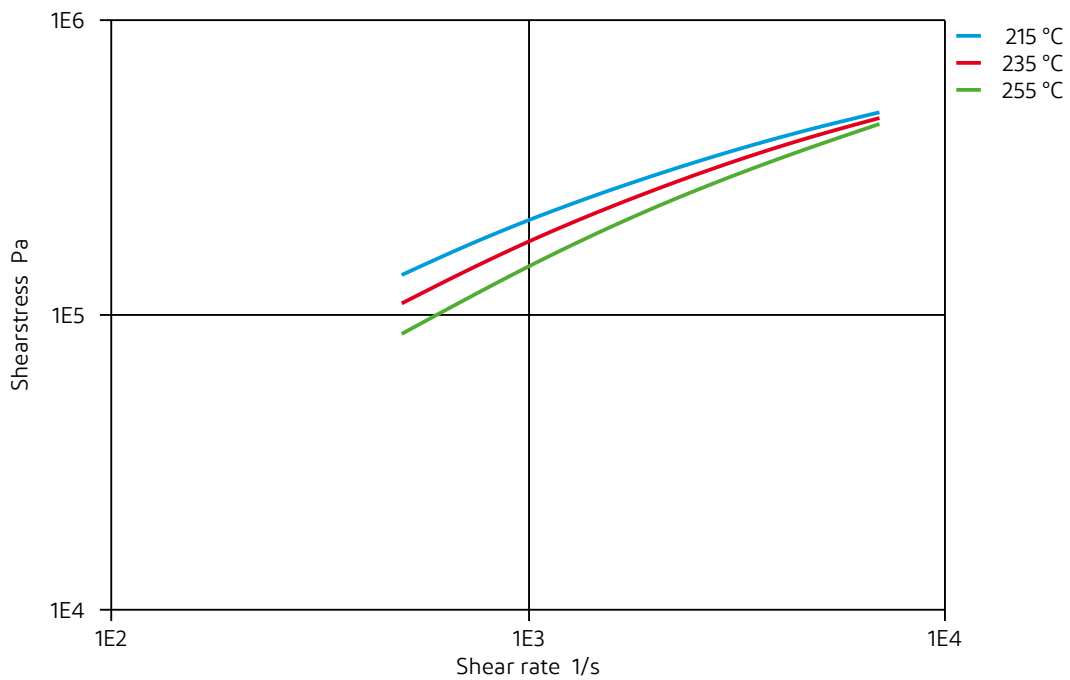




Hytrel[®] 5553FG NC010

THERMOPLASTIC POLYESTER ELASTOMER

Dynamic Tensile modulus-temperature
(measured on Hytrel[®] 5556)

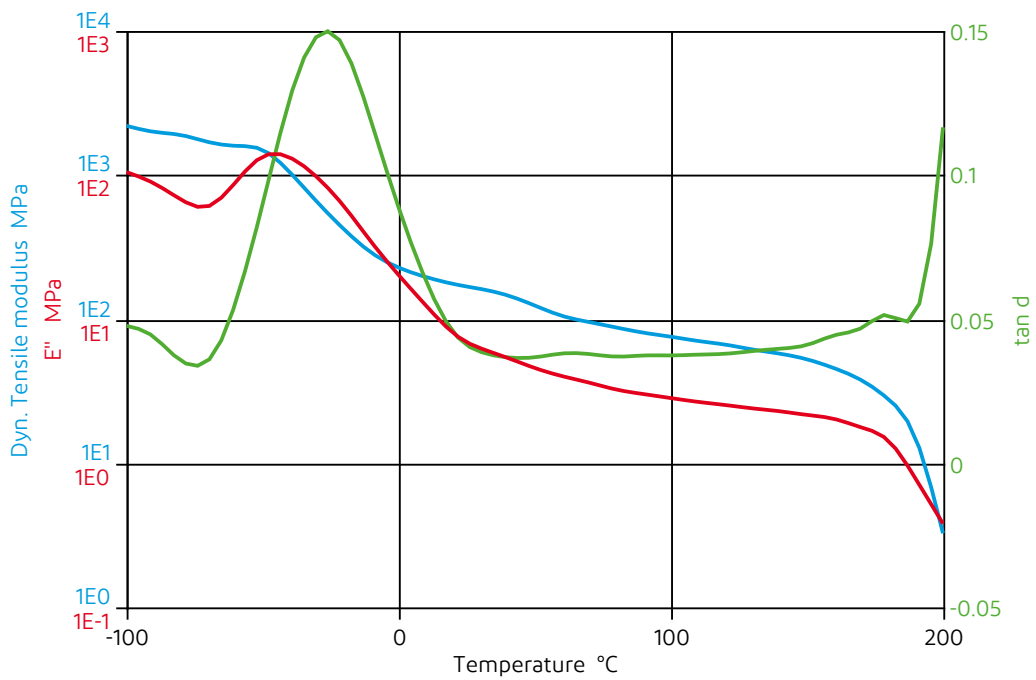




Hytrel[®] 5553FG NC010

THERMOPLASTIC POLYESTER ELASTOMER

Stress-strain
(measured on Hytrel[®] 5556)

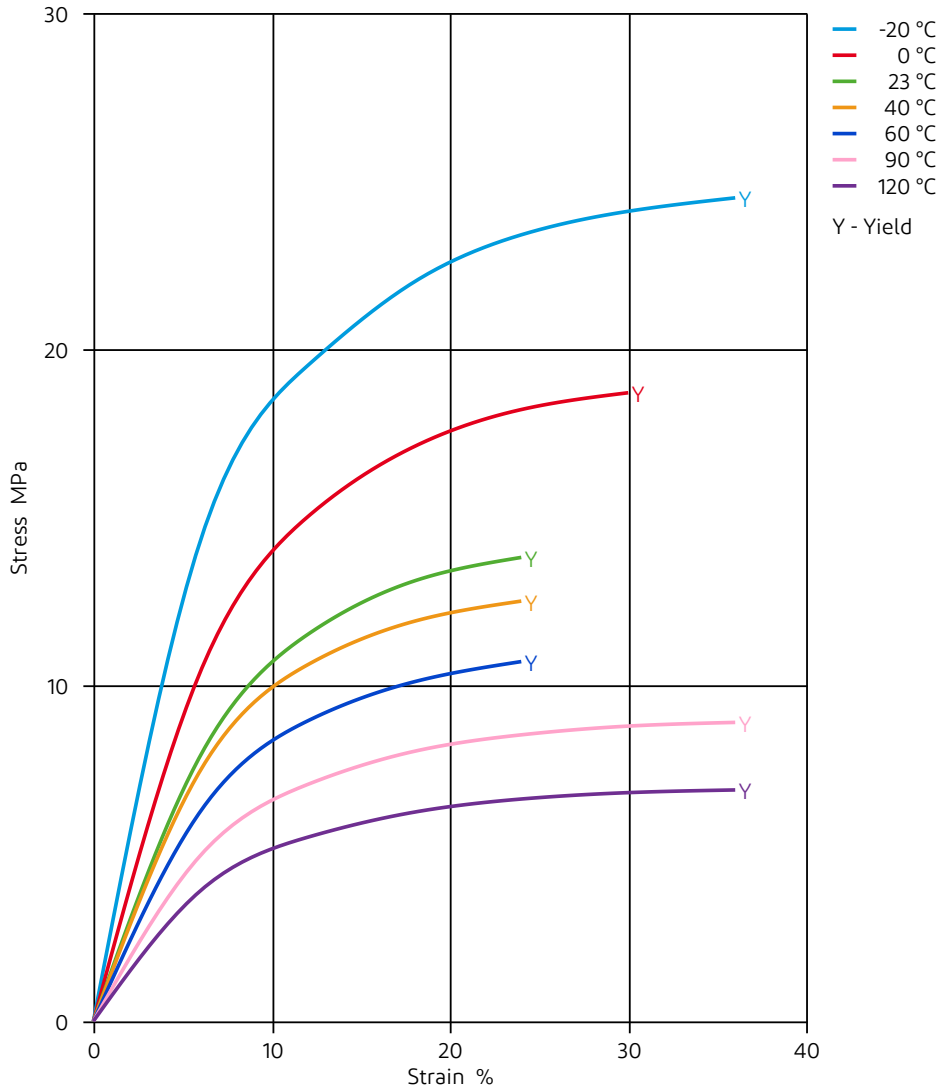




Hytrel® 5553FG NC010

THERMOPLASTIC POLYESTER ELASTOMER

Secant modulus-strain
(measured on Hytrel® 5556)

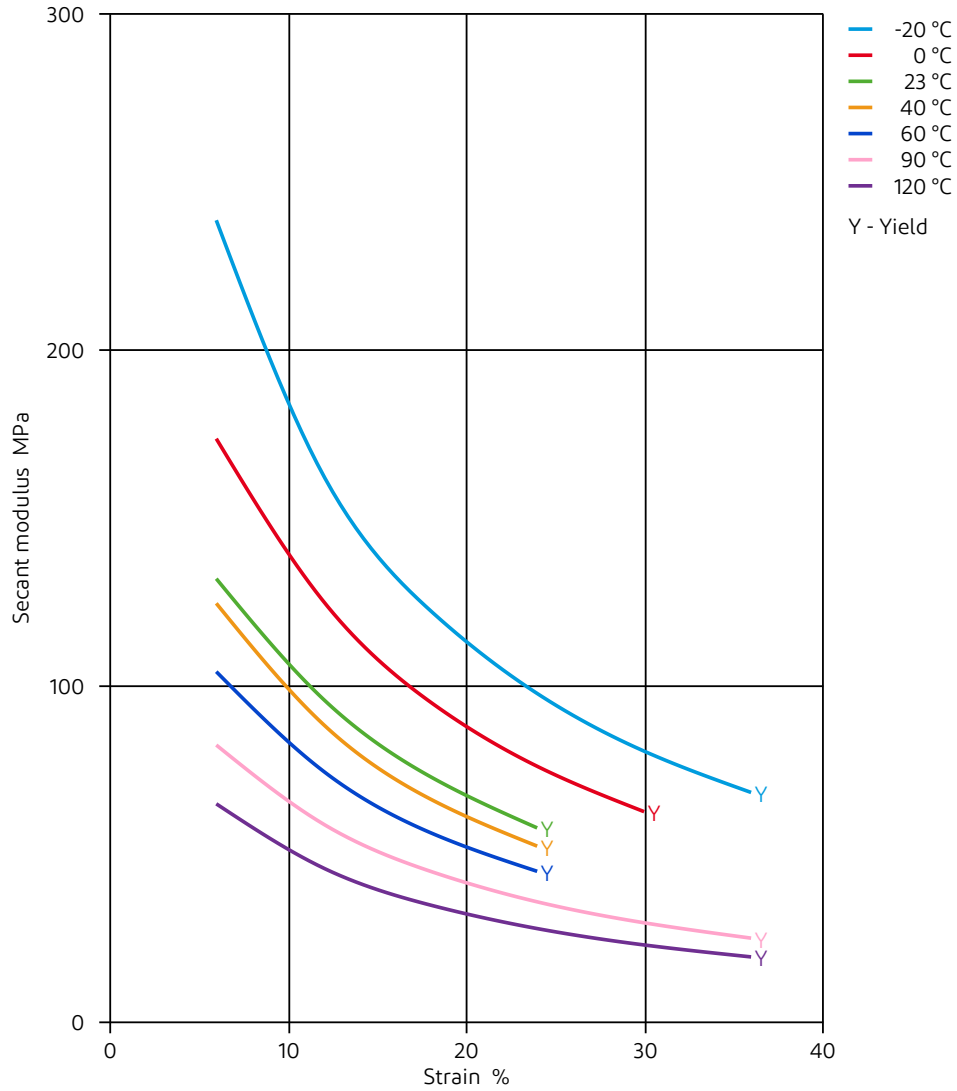




Hytrel[®] 5553FG NC010

THERMOPLASTIC POLYESTER ELASTOMER

Stress-strain (isochronous) 23°C

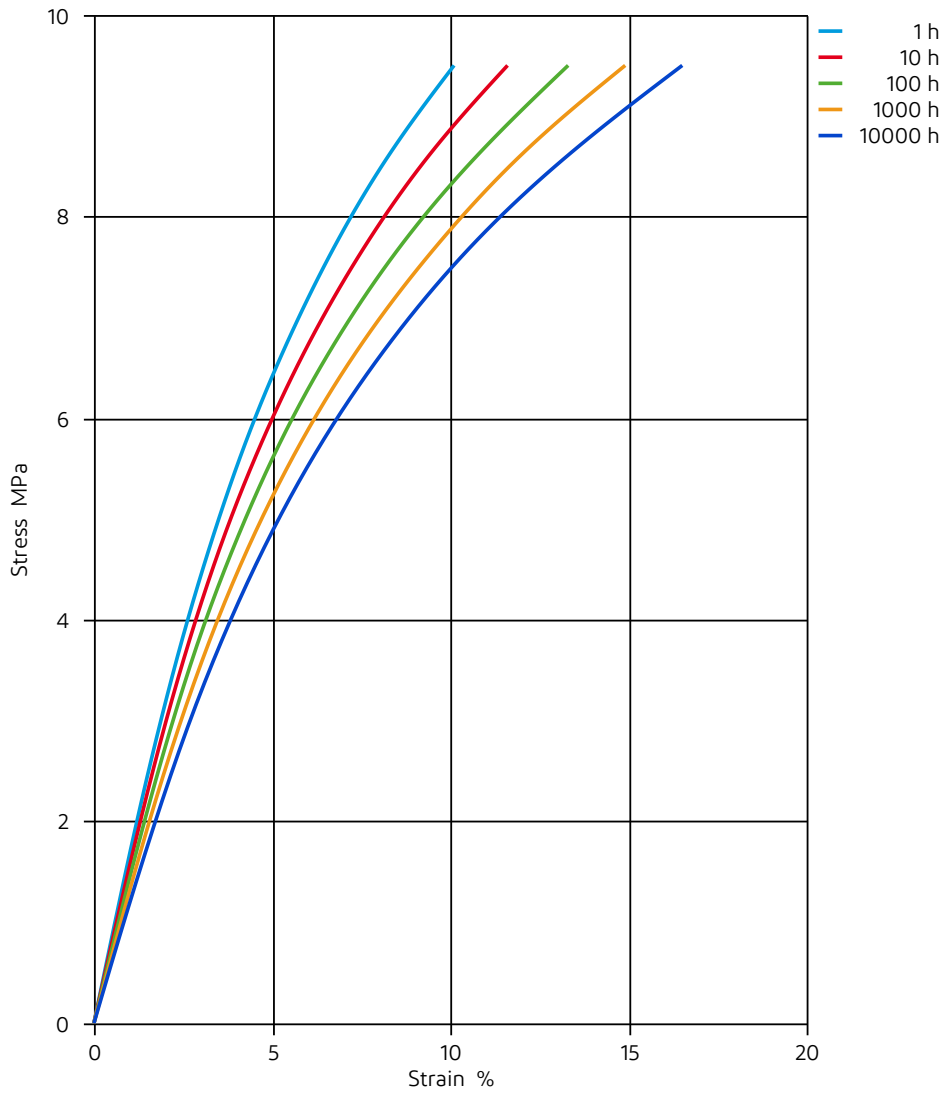




Hytrel[®] 5553FG NC010

THERMOPLASTIC POLYESTER ELASTOMER

Creep modulus-time 23°C

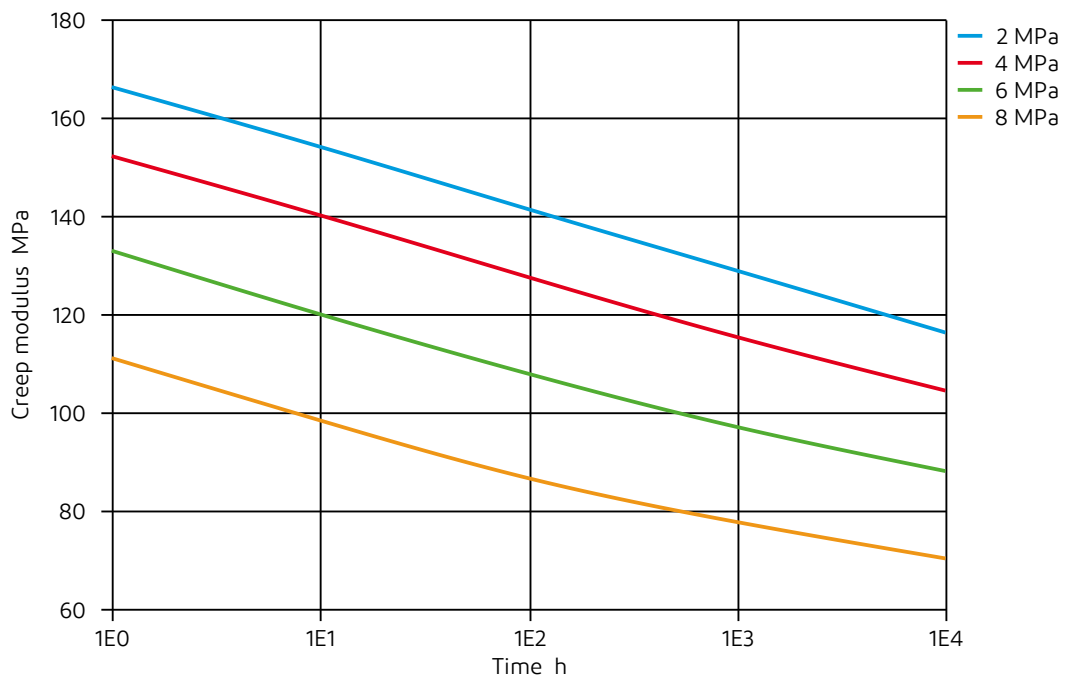




Hytrel[®] 5553FG NC010

THERMOPLASTIC POLYESTER ELASTOMER

Stress-strain (isochronous) 40°C

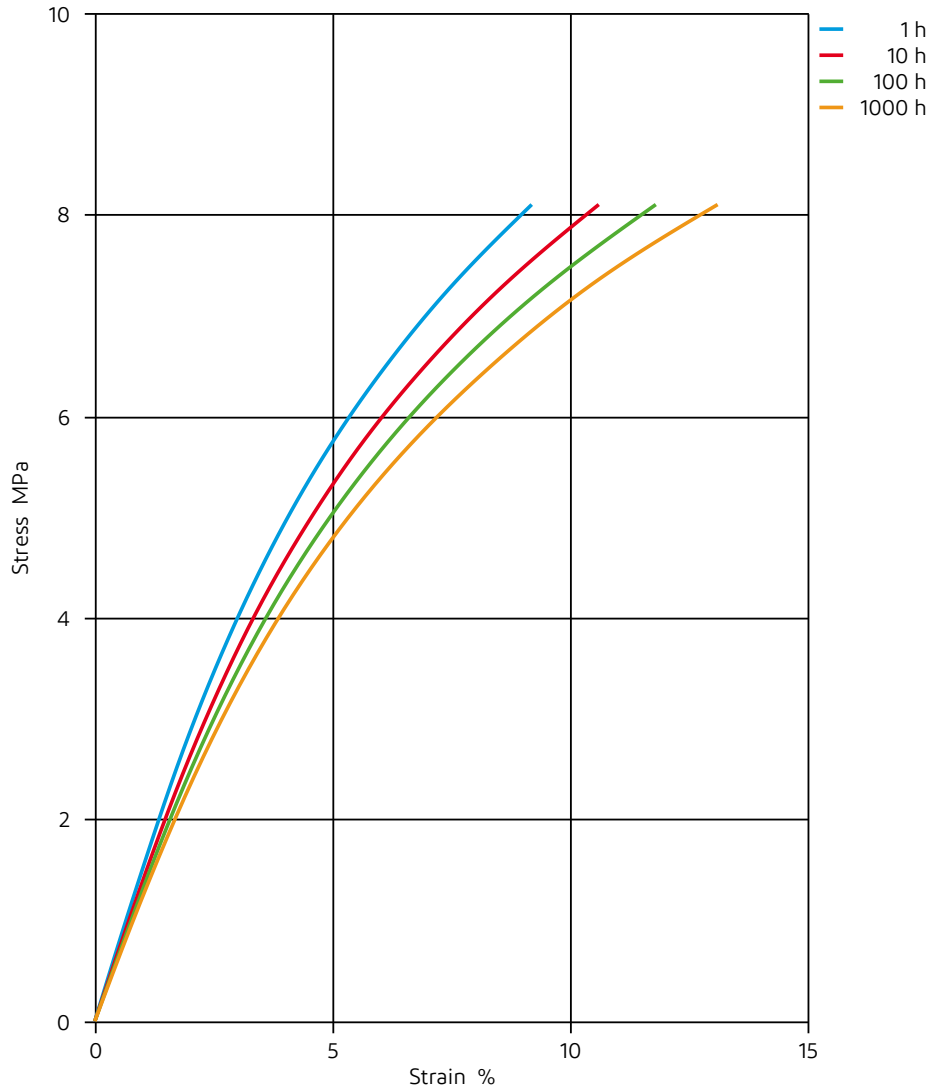




Hytrel[®] 5553FG NC010

THERMOPLASTIC POLYESTER ELASTOMER

Creep modulus-time 40°C

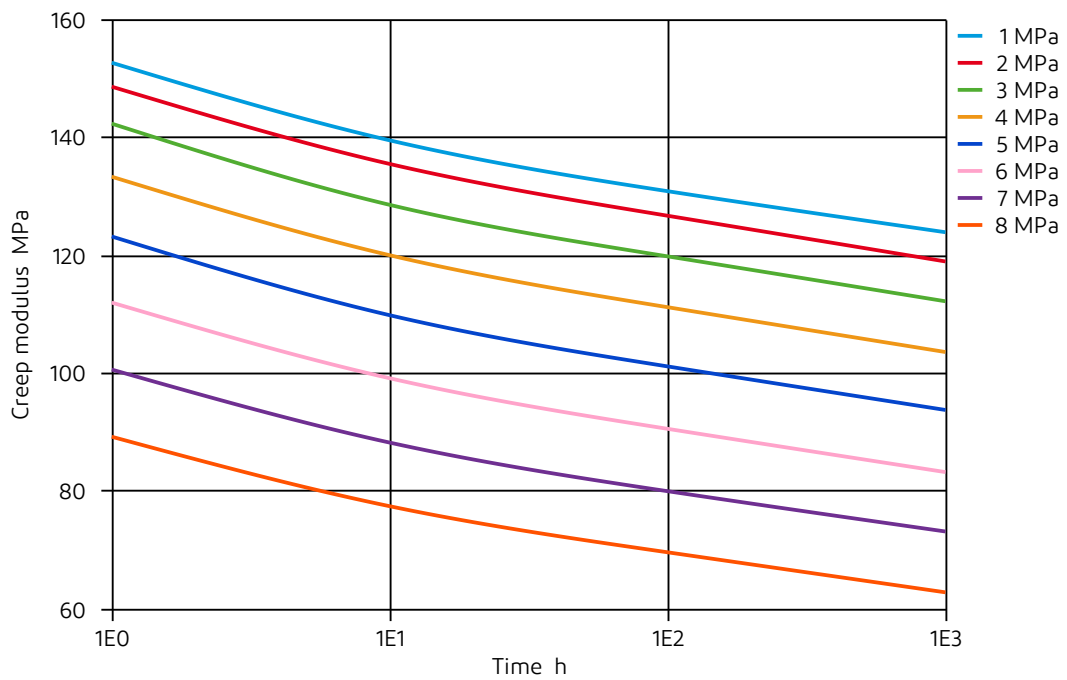




Hytrel® 5553FG NC010

THERMOPLASTIC POLYESTER ELASTOMER

Stress-strain (isochronous) 80°C

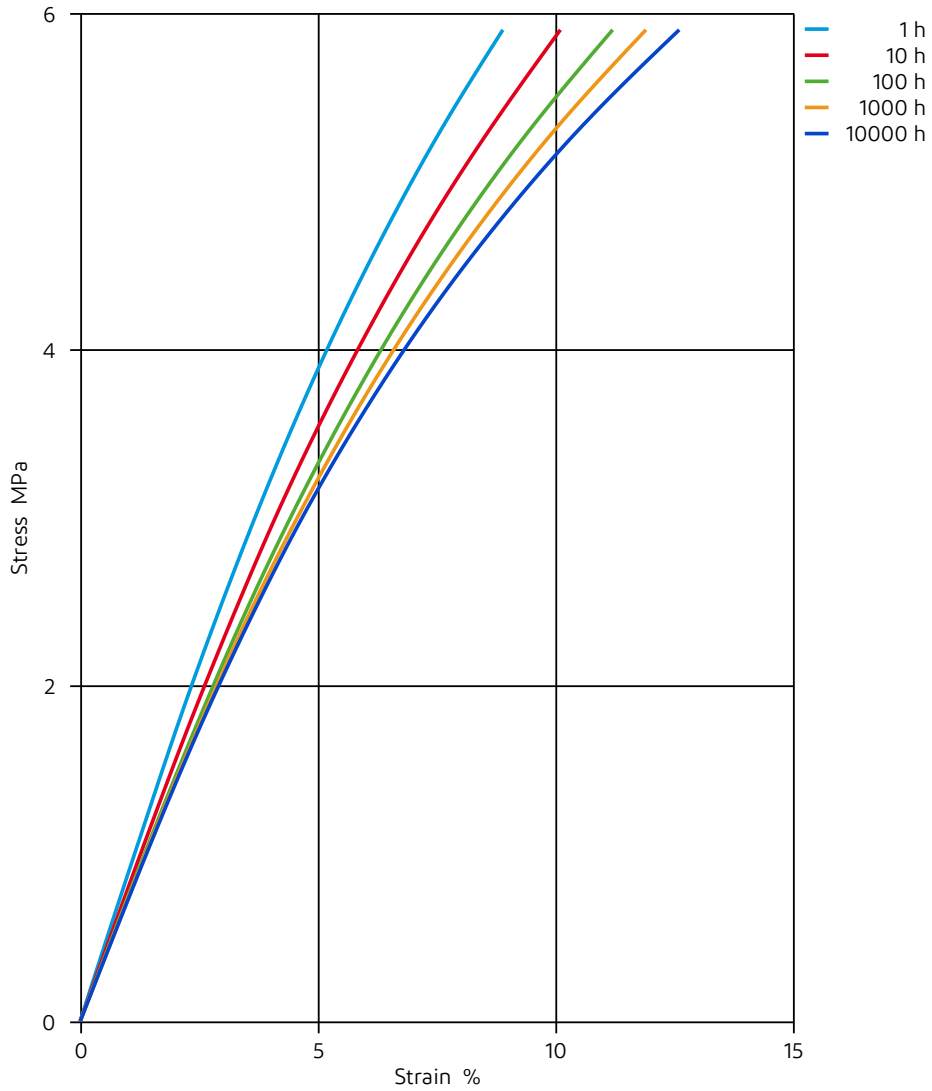




Hytrel[®] 5553FG NC010

THERMOPLASTIC POLYESTER ELASTOMER

Creep modulus-time 80°C

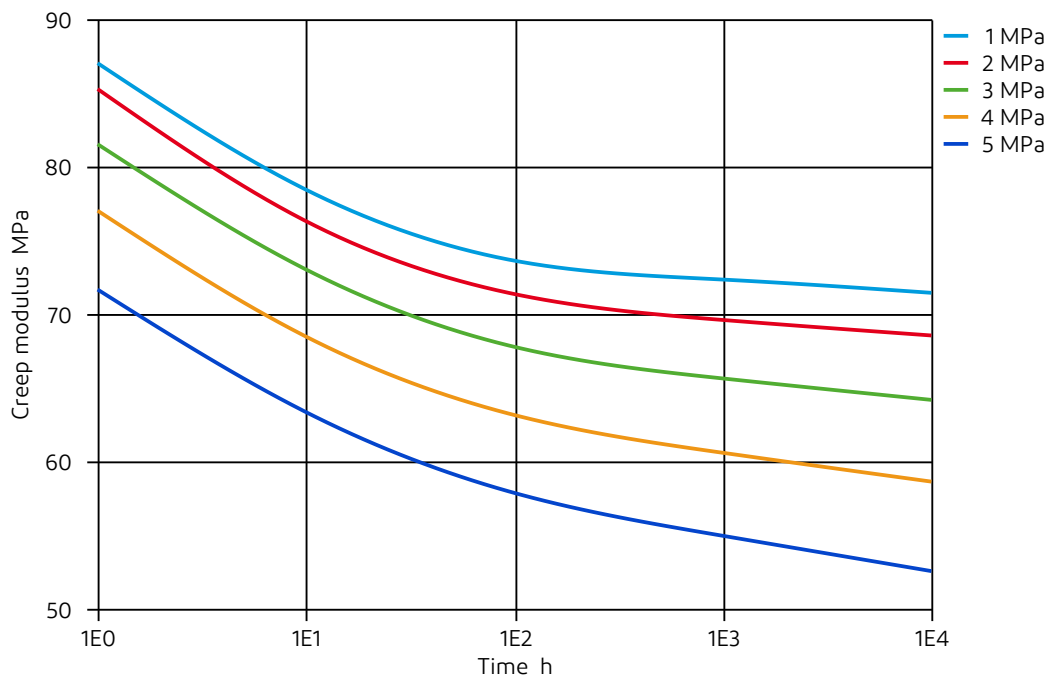




Hytrel® 5553FG NC010

THERMOPLASTIC POLYESTER ELASTOMER

Stress-Strain (Flexible Materials)
(measured on Hytrel® 5556)

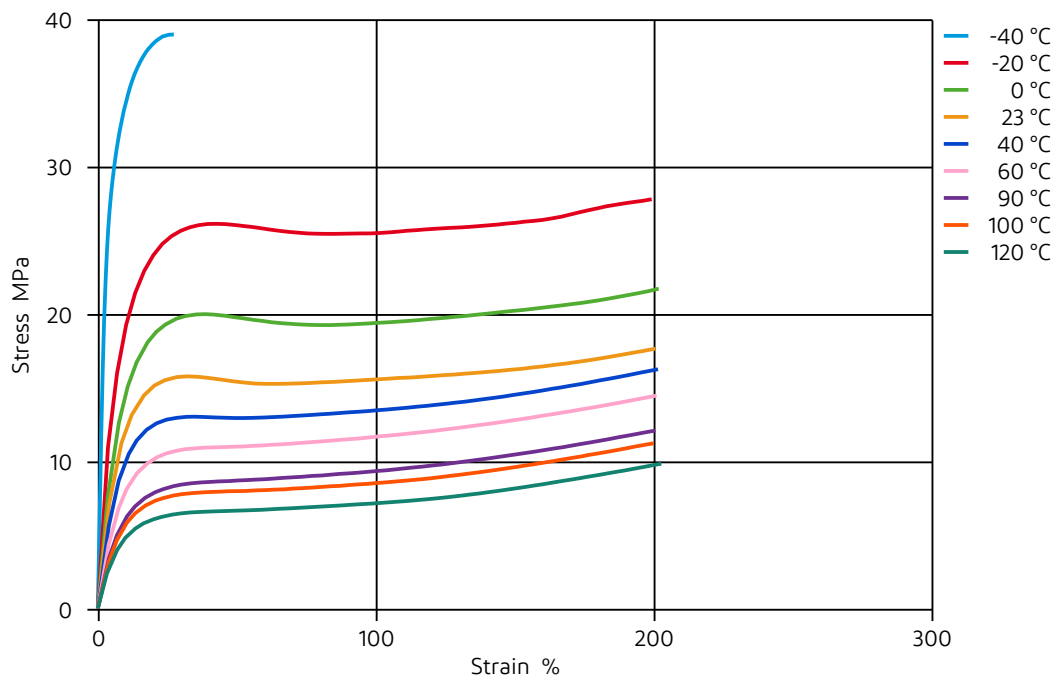

Hytrel[®] 5553FG NC010

THERMOPLASTIC POLYESTER ELASTOMER

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass), 23°C
- ✓ Citric Acid solution (10% by mass), 23°C
- ✓ Lactic Acid (10% by mass), 23°C
- ✗ Hydrochloric Acid (36% by mass), 23°C
- ✗ Nitric Acid (40% by mass), 23°C
- ✗ Sulfuric Acid (38% by mass), 23°C
- ✓ Sulfuric Acid (5% by mass), 23°C
- ✗ Chromic Acid solution (40% by mass), 23°C

Bases

- ✓ Sodium Hydroxide solution (35% by mass), 23°C
- ✓ Sodium Hydroxide solution (1% by mass), 23°C
- ✓ Ammonium Hydroxide solution (10% by mass), 23°C

Alcohols

- ✓ Isopropyl alcohol, 23°C
- ✓ Methanol, 23°C
- ✓ Ethanol, 23°C

Hydrocarbons

- ✓ n-Hexane, 23°C
- ✓ Toluene, 23°C
- ✓ iso-Octane, 23°C

Ketones

- ✗ Acetone, 23°C

Ethers

- ✗ Diethyl ether, 23°C

Mineral oils

- ✓ SAE 10W40 multigrade motor oil, 23°C
- ✗ SAE 10W40 multigrade motor oil, 130°C
- ✗ SAE 80/90 hypoid-gear oil, 130°C
- ✓ Insulating Oil, 23°C

Standard Fuels

- ✗ ISO 1817 Liquid 1 - E5, 60°C
- ✗ ISO 1817 Liquid 2 - M15E4, 60°C
- ✗ ISO 1817 Liquid 3 - M3E7, 60°C
- ✗ ISO 1817 Liquid 4 - M15, 60°C
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C), 23°C
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4), 23°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), 23°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), 90°C
- ✗ Diesel fuel (pref. ISO 1817 Liquid F), >90°C



Hytrel® 5553FG NC010

THERMOPLASTIC POLYESTER ELASTOMER

Salt solutions

- ✓ Sodium Chloride solution (10% by mass), 23°C
- ✗ Sodium Hypochlorite solution (10% by mass), 23°C
- ✓ Sodium Carbonate solution (20% by mass), 23°C
- ✓ Sodium Carbonate solution (2% by mass), 23°C
- ✓ Zinc Chloride solution (50% by mass), 23°C

Other

- ✓ Ethyl Acetate, 23°C
- ✗ Hydrogen peroxide, 23°C
- ✗ DOT No. 4 Brake fluid, 130°C
- ✗ Ethylene Glycol (50% by mass) in water, 108°C
- ✓ 50% Oleic acid + 50% Olive Oil, 23°C
- ✓ Water, 23°C
- ✓ Water, 90°C
- ✓ Phenol solution (5% by mass), 23°C

Symbols used:

- ✓ possibly resistant
Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).
- ✗ not recommended - see explanation
Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).

The information set forth herein is furnished free of charge, is based on technical data that DuPont believes to be reliable, and represents typical values that fall within the normal range of properties. This information relates only to the specific material designated and may not be valid for such material used in combination with other materials or in other processes. It is intended for use by persons having technical skill, at their own discretion and risk. This information should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards and comply with applicable law. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents.

CAUTION: Do not use DuPont materials in medical applications involving implantation in the human body or contact with internal body fluids or tissues unless the material has been provided from DuPont under a written contract or other acknowledgement that is consistent with the DuPont policy regarding medical applications and expressly acknowledges the contemplated use. For further information, please contact your DuPont representative.

DuPont's sole warranty is that our products will meet our standard sales specifications in effect at the time of shipment. Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted. TO THE FULLEST EXTENT PERMITTED BY APPLICABLE LAW, DUPONT SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR NON-INFRINGEMENT. DUPONT DISCLAIMS LIABILITY FOR ANY SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.